
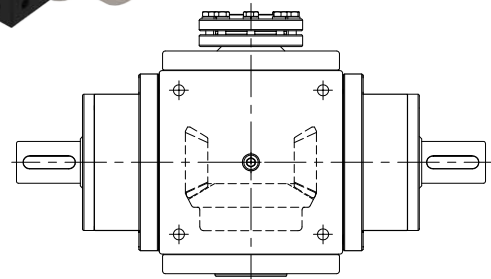



ST-YN series



RATIO : 1.2.3.4.5 (單段 1-Stage)

雙入力軸心 - 單邊免鍵軸套


Double Input Shaft - Single Clamping

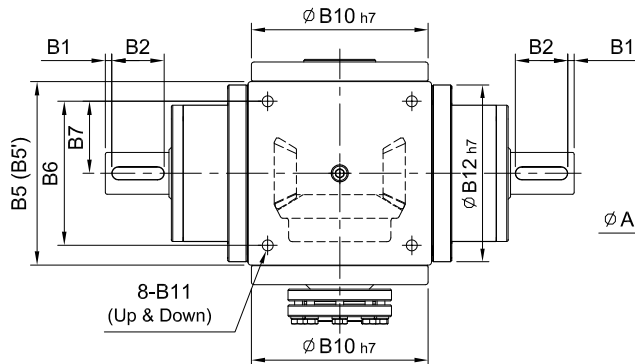

R 軸
Shaft Direction

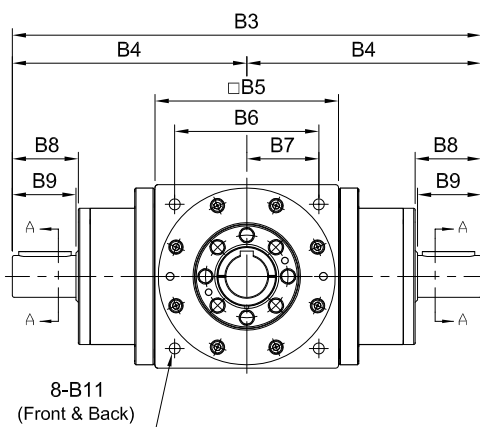

8-B11
(Front & Back)

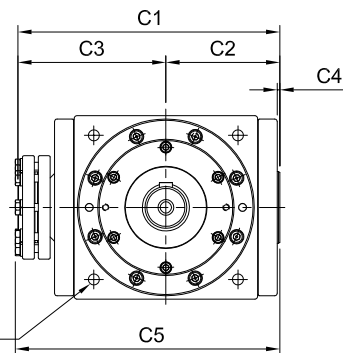

unit: mm

	Model Code	65	65 (1:1)	75	90	110	140	170	210	240	280
		65	65 (1:1)	75	90	110	140	170	210	240	280
A	A1	14	16	18	22	32	40	50	55	60	60
	A2	5	5	6	6	10	12	14	16	18	18
	A3	16	18	20.5	24.5	35	43	53.5	59	64	64
	A4	M5 x P0.8	M5 x P0.8	M8 x P1.25	M8 x P1.25	M10 x P1.5	M12 x P1.75	M12 x P1.75	M16 x P2.0	M16 x P2.0	M16 x P2.0
B	B1	2.5	2.5	5	5	5	5	5	5	5	5
	B2	15	25	25	30	40	50	65	70	90	90
	B3	190	210	247	304	360	430	540	620	730	730
	B4	95	105	123.5	152	180	215	270	310	365	365
	B5(B5')	65	75(74)	90	110	140	170(168)	210	240	280	280
	B6	52	60	72	88	110	134	170	190	220	220
	B7	26	30	36	44	55	67	85	95	110	110
	B8	22	32	38	43	53.5	64	77	82	105	105
	B9	20	30	35	40	50	60	75	80	100	100
	B10	62	64	73	88	106	135	164	205	228	275
C	B11	M5 x P0.8	M6 x P1.0	M6 x P1.0	M8 x P1.25	M10 x P1.5	M12 x P1.75	M16 x P2.0	M16 x P2.0	M16 x P2.0	M16 x P2.0
	B12	-	73	88	106	135	164	205	228	219	219
	C1	104	109	120	138	169	200	240	285	324	370
	C2	42	44.5	50	59	72	87	102	125	146	164
	C3	62	64.5	70	79	97	113	138	160	178	206
	C4	2	2	2	2	2	2	2	2	2	3
	C5	110	113	124	142	171	202	242	288	329	369.8
	C6	5	5	6	6	10	12	14	16	18	18
	C7	16.3	16.3	20.8	24.8	35.3	43.3	53.8	59.3	64.4	64.4
	C8	14	14	18	22	32	40	50	55	60	60
	C9	22	22	28	34	44	52	65	73	83	83
	C10	6-M6	6-M6	6-M6	8-M6	8-M6	8-M8	8-M8	8-M8	8-M8	8-M10
Weight ±3% (kg)		2.85	3.6	6.2	11.5	18	28	57	95.5		